

# POS



## The One-of-a-kind Highly Integrated Fanless 10.4" POS Terminal


### *Features and Benefits:*

- Intel® ATOM N270 CPU
- 10.4" LCD display with touch
- Flexible design for versatile applications
- Fanless POS
- Optional 2"/3" easy loading thermal printer
- Optional MSR, i-Button & fingerprint module
- Small footprint
- Streamline design




# MINIPOS - 10,4" dotykový pokladní terminál


Horní pohled

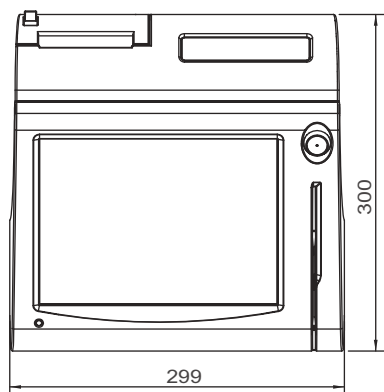

Ze strany

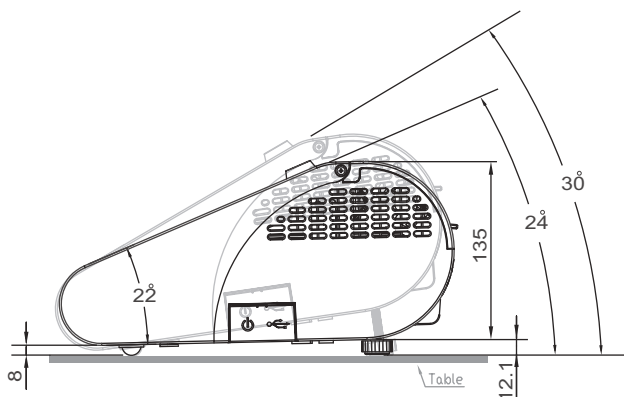

Zezadu

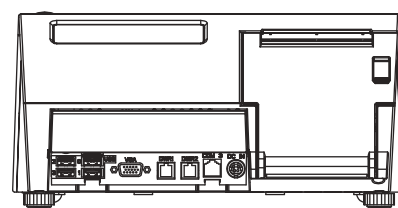

Unit: mm

## Specifikace

System	
<b>Procesor</b>	Intel® ATOM N270 CPU
<b>Paměť</b>	1 x DDR2 SO-DIMM Slot, 512MB DDR2 SO-DIMM (up to 1GB)
<b>Core Logic</b>	Intel® 945GSE + ICH7M
<b>Network</b>	10/100/1000Base-T Fast Ethernet
<b>Power Supply</b>	120 Watt Power Adaptor
<b>System Weight</b>	4.5 kg (Fanless)
<b>Rozměry (WxHxD)</b>	300 x 299 x 135 mm (11.81" x 11.77" x 5.31")
<b>O.S. Compliant</b>	Windows XP / XPE, WEPOS, POSReady 2009

## Storage

<b>HDD</b>	1 x 2.5" SATA HDD (standard 160GB)
<b>CF</b>	Bootable Compact Flash slot for CF type I/II storages

## I/O Ports

<b>USB</b>	4 x USB 2.0 ports / 1 x USB 2.0 on side bezel
<b>Serial Ports</b>	3 x DB-9 (COM 1/2/4), 1 x RJ45 (COM 3), +5/12V Selectable (COM 1~3)
<b>PS/2</b>	1 x PS/2 ports (default at keyboard)
<b>LAN</b>	1 x 10 / 100/1000 Mbps
<b>VGA</b>	1 x DB-15 VGA Interface
<b>Audio</b>	1 x 2W speaker
<b>Cash Drawer</b>	1 x RJ11 Cash Drawer port (12V/24V)
<b>Pinter</b>	2" or 3" easy loading thermal printer with Auto cutter

## Display

<b>LCD</b>	10.4" TFT LCD
<b>Max. Resolution</b>	1024 x 768 / 800 x 600
<b>Brightness</b>	300 / 230 cd/m <sup>2</sup>
<b>Touch Screen</b>	5-wire Analog resistive
<b>Viewing Angle</b>	0 ~ 65 degree

## Environment

<b>EMC &amp; Safety</b>	CE / FCC / cUL / CB
<b>Operating Temp.</b>	0° ~ 35°C
<b>Storage Temp.</b>	-20° ~ 60°C
<b>Humidity</b>	20% ~ 90%

## Ordering Information

<b>PS3100</b>	10.4" POS Terminal with Intel® ATOM N270 CPU, 512MB DDR2 SO-DIMM, 160GB HDD
<b>VFD Customer Display</b>	Vacuum Fluorescent Display, 20 columns and 2 lines, each column is 5 x 7 dots
<b>i-Button</b>	Read only, output through PS/2 KB interface
<b>MSR</b>	JIS-I or II, ISO Track1+2+3 (PS/2 KB Interface)
<b>Color</b>	Red, Navy Blue, Black or White
<b>OS</b>	Windows XP / XPE, WEPOS, POSReady 2009
<b>Wireless LAN</b>	Mini PCIe Wireless LAN Module 802.11 b/g
<b>Fingerprint</b>	Embedded Fingerprint module (USB interface)

Distributor pro EVROPU - [www.zujic.com](http://www.zujic.com)



ISO CERTIFIED

9001 14001